



O Z E A N O  
fresh environment





# **INSTALLATION GUIDE OF ETHYLENE ABSORPTION FILTERS OZEANO**

**Installation when the grid is located  
between the container panel and the  
bottom wall of the container**

**Installation when the grid is located as a  
continuation of the panel of the  
container (perpendicular to the floor)**

**Installation when it is necessary to install  
more than two filters in the cold  
equipment**



## Installation when the grid is located between the container panel and the bottom wall of the container

1. Take the filters from the plastic bag
2. Use 2 flanges to filter each filter (included)
3. Filters must be placed on the intake grid of the cold equipment
4. If the grill has a "L" shape, filters should always be installed in the part of the grid that is between the panel and the bottom wall (not in the part of the grill that is perpendicular to the floor)

Installation is manual and simple with the flanges that come in every box of filters





**IMPORTANT: Cold equipment must be turned off while filters are installed with flanges in the grid of the cold equipment and must be turned on after the fruit is loaded and the container door is completely closed**





## Installation when the grid is located between the container panel and the bottom wall of the container (examples)

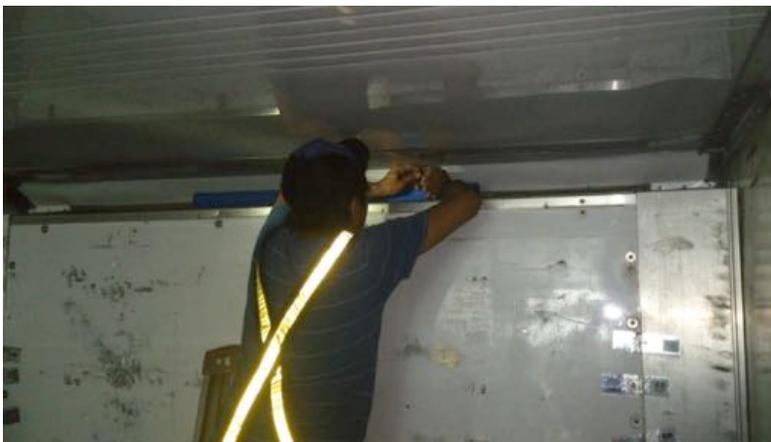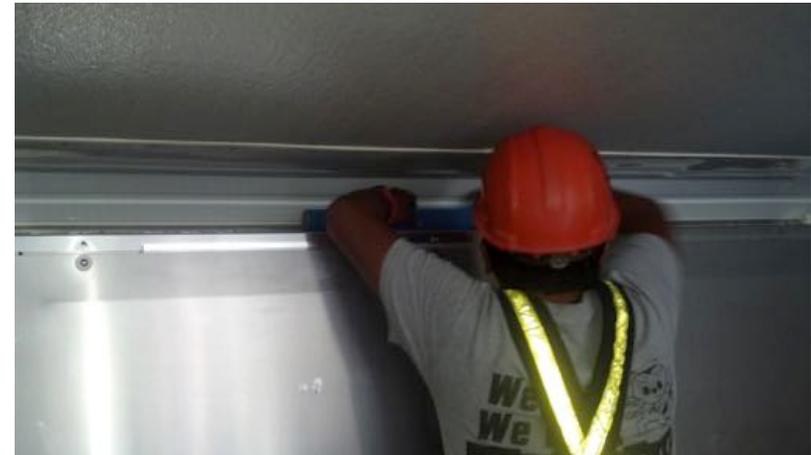



## Installation when the grid is located as a continuation of the panel of the container (perpendicular to the floor)

1. Take the filters from the plastic bag
2. Use 2 flanges to filter each filter (included)
3. Filters must be placed on the intake grid of the cold equipment
4. The filters should be placed on top of the grid (but not touching the ceiling), avoiding contact between fruit boxes and filters at any time
5. If 2 filters are installed, the filters should not overlap

Installation is manual and simple with the flanges that come in every box of filters



**IMPORTANT: Cold equipment must be turned off while filters are installed with flanges in the grid of the cold equipment and must be turned on after the fruit is loaded and the container door is completely closed**



## Installation when it is necessary to install more than two filters in the cold equipment

The maximum number of filters to install on the cold unit is 2

In case more filters need to be installed, they should be placed high on the pallets, in a place with significant airflow inside the container



**Corners can be used to place filters in a high place on the pallets**



O Z E A N O  
fresh environment

[www.ozeano.net](http://www.ozeano.net)  
[pablo.mugica@ozeano.net](mailto:pablo.mugica@ozeano.net) (+34653046736)  
[inigo.alonso@ozeano.net](mailto:inigo.alonso@ozeano.net) (+34618700965)